


BSD 4-07N CATV loop-through outlet 7 dB | 5...1006 MHz

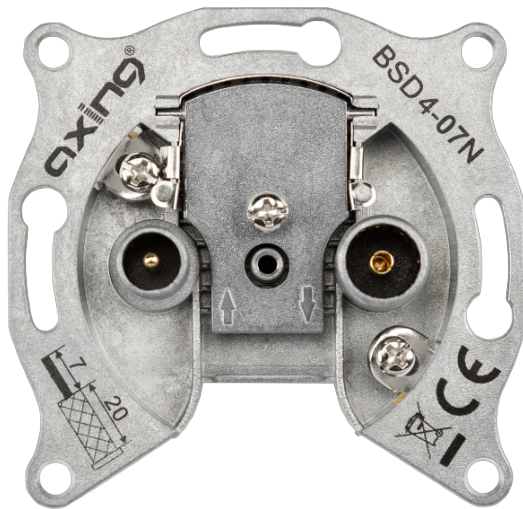

- ✓ Suitable for broadband return path
- ✓ Surface treated

Order information

Type	BSD 4-07N
Order no.	BSD00407N
GTIN	7611682007312
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Tap method	Double directional coupler
Through loss	3.9...6.7 dB
Trunk line	
Frequency range input	5...1006 MHz
Through loss @ 5...1006 MHz	<5.5 dB
Isolation internal	≥ 15 dB
Frequency range output	5...1006 MHz
Suitable cables (Inner conductor outer diameter)	0.63...1.13 mm 4.7...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	5...1006 MHz
Tap loss	7 dB ± 2 dB
Radio connector	
Connector type	IEC-female
Frequency range	5...1006 MHz
Tap loss	7 dB ± 2 dB
General	
Dimensions (W × H × D) appr.	70 × 66 × 32 mm
Weight	0.091 kg

Suitable products

[TZU 2-00 Cover plate | TV/R | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-10 Cover plate | TV/R | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-00 Terminating resistor](#)