


PRODUCT DATA SHEET

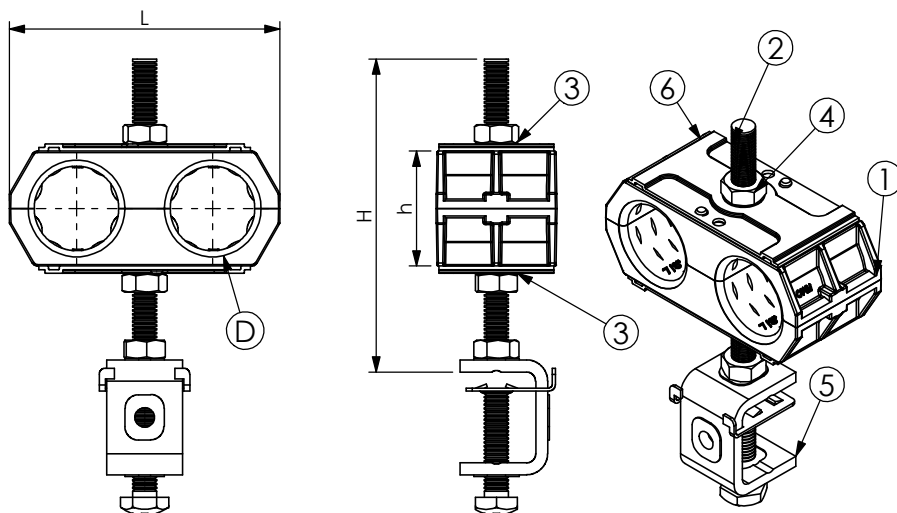

A) SPECIFICATIONS

- 1 H.D.P.E. SAB double saddle
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel elastic washer REI 8
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel MIM clamp
- 6 Stainless steel pressure plate PRUC

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -50°C +80°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	Ø D	L	h	H	BOX	WEIGHT
61 1576 0209	UCM/ 2x9	8 - 9	56	75	21	20	170
61 1576 0211	UCM/ 2x11	10 - 11	56	75	21	20	170
61 1576 0213	UCM/ 2x13	12 - 13	68	75	27	20	175
61 1576 0214	UCM/ 2x1/2"S (14)	13 - 14	68	75	27	20	175
61 1576 0238	UCM/ 2x3/8" (16)	15 - 16	68	75	27	20	175
61 1576 0212	UCM/ 2x1/2" (17)	16 - 17	68	75	27	20	175
61 1576 0258	UCM/ 2x5/8" (23)	21 - 23	90	100	38	20	230
61 1576 0278	UCM/ 2x7/8" (28)	27 - 28	90	100	38	20	230
61 1576 2118	UCM/ 2x1.1/8" (38)	36 - 38	114	150	54	20	230
61 1576 2114	UCM/ 2x1.1/4" (40)	39 - 40	114	150	54	20	275
61 1576 2148	UCM/ 2x1.5/8"S (49)	48 - 49	137	150	66	20	277
61 1576 2158	UCM/ 2x1.5/8" (52)	50 - 52	137	150	66	20	275

RI	DATE	DR	DATE	AP	Description:
02					Cable Clamps type UCO +MIM 8/25 without PRUC
01					
00	06/10/15	G.S.	06/10/15	A.V.	
1 ST EMISSION					
					Use: Fixing of 2 cables on flat 3-25 and round ø 8-25. 