


CANOVATE®

Cat.6A UTP 8P8C Plug, Two Rolls Three Branches, Two Parts Type, 3U

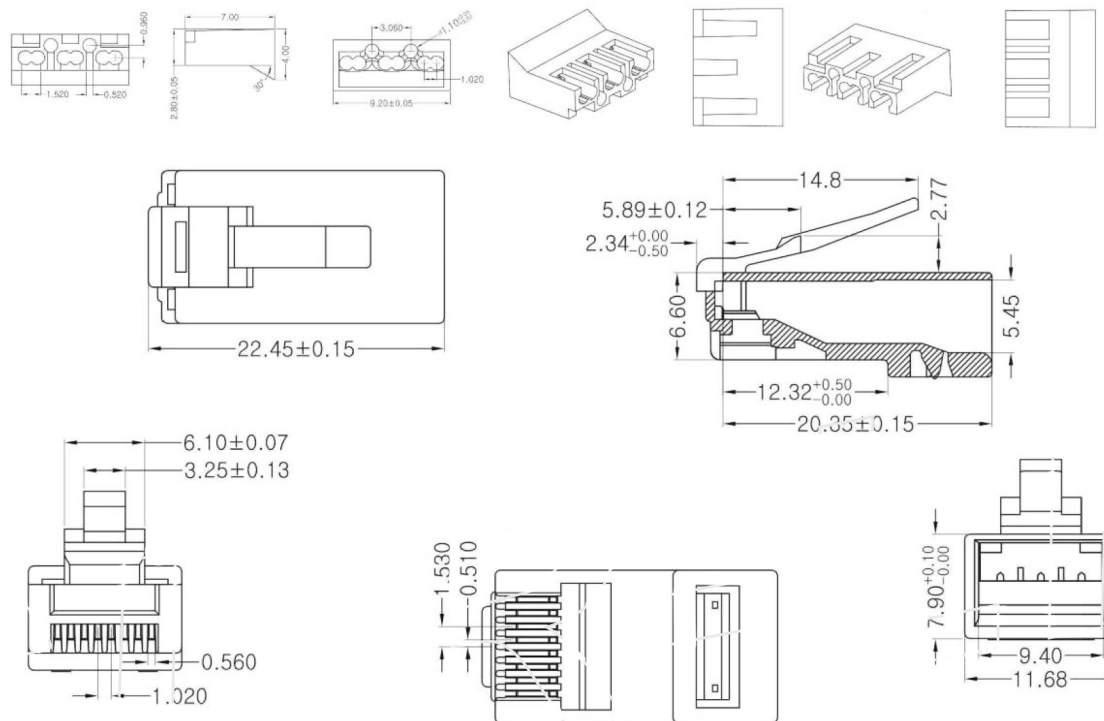

BLADE:

Type	E	Y
Drawing		
Mark		

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.
INSULATION RESISTANCE: 100 M Ω .
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20kg MIN.
DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.
GOLD PLATING: 3u"-50u",ARE AVAILABLE.